


# Two Electrode Gas Tube Surge Arrester

Part Number: **Y08SV-312B**




- Features:**
- UL & cUL 1414 6th Edition Recognized Y2 Compliant (*File E165829*)
  - UL 1449 Recognized (*File E328370*)
  - 100% Lead-Free (RoHS Compliant)
  - IEC60950 Line Isolation
  - Proven Performance
  - World Renowned Quality

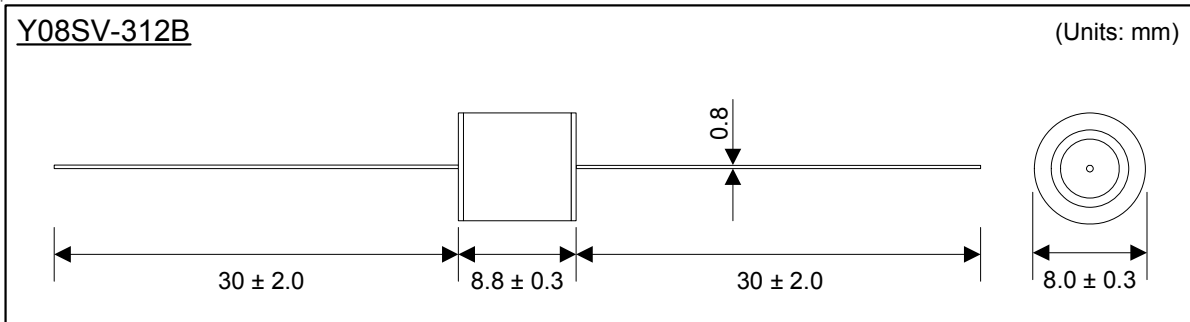

**Applications:**

- Transient Voltage Surge Suppression (TVSS)
- AC Line Input Protection
- Power Supplies
- CATV Systems
- Televisions
- Antennas
- Set Top Boxes

Marking Example: Part Number Y08SV-312B

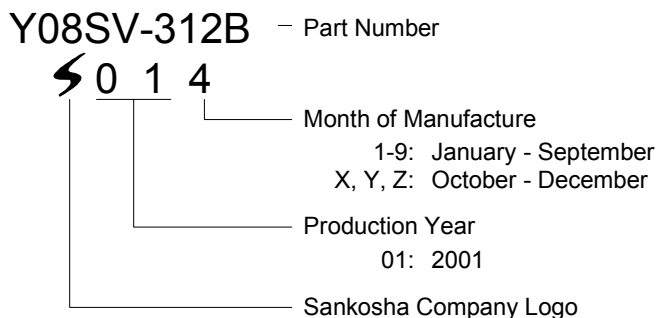

**Electrical Characteristics**

1.	DC Breakdown Voltage	5 kV/sec	2850 - 3500V		
2.	Impulse Breakdown Voltage	1 kV/μsec	< 3700V		
3.	Insulation Resistance	DC 1000V	> 10,000 M-ohm		
4.	Capacitance	1 MHz	< 1.0 pF		
5.	Impulse Discharge Current	8/20 μsec	10 kA	1 Time	
		8/20 μsec	3 kA	Each Polarity 10 Times	3 Min. Intervals
6.	Impulse Life	8/20 μsec 100A	> 300 times	1-2 Minute Intervals	

**After Life Tests**

7.	DC Breakdown Voltage	5 kV/sec	2650 - 3700V		
8.	Impulse Breakdown Voltage	1 kV/μsec	< 4200V		
9.	Insulation Resistance	DC 1000V	> 1 M-ohm		

SANKOSHA

SANKOSHA