

Coaxial Surge Protectors (SPD's)

Part Number: **N-JP-5**



Features:

- High reliability protection from surges caused by lightning or other electrical transients
- Meets IEC 61643-21 compliance, Category C2 & D1 Impulse Requirements
- High energy / low capacitance GDT technology
- High durability and RoHS Compliant
- Low insertion loss
- High frequency and bidirectional




100% Lead-Free (RoHS Compliant)

Electrical Characteristics	
Frequency Range	DC - 3GHz
DC Breakdown (Turn-On) (100V/s)	≥ 200V
Voltage Protection Level - U _p (Impulse Breakdown V)	≤ 800V
Technology Type	Gas Discharge Tube (GDT)
Insertion Loss	< 0.3dB
Return Loss	≥ 20dB
VSWR	< 1.2:1
Maximum Power	60W
Maximum Current - Category C2 (8/20 <i>us</i>)	2kA (10 times), 5kA (1 time)
Maximum Current - Category D1 (10/350 <i>us</i>)	1kA (2 times)
Impedance	50 Ω
Insulation Resistance (at 100V _{DC})	≥ 100M Ω
Mechanical Characteristics	
Connector Type	N Type (P-J)
Connection Method	Series (Bidirectional)
Grounding	Screw
Weight	80g (2.82oz)
Environmental Characteristics	
Environmental Rating	IP20
Operating Temperature Range	-30°C to +60°C (-22°F to 140°F)
Maximum Operating Altitude	2000m (6562ft)
Relative Humidity	30% - 90%

Applications:

- Wireless (WiFi) Communications
- Measuring Instruments
- Transmitters and Receivers
- Tower Equipment (TTE and TMA)
- Wimax Broadband
- Antenna Systems
- High Frequency Coaxial Lines using N-type Connectors

External view

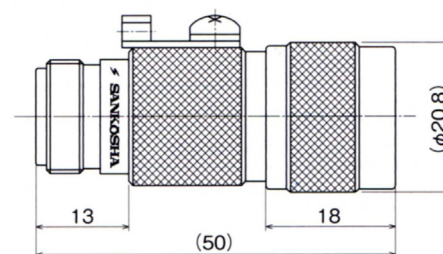

Units: mm