

# Three Electrode Gas Discharge Tube (GDT)

Part Number: **3YD-230A / 3YD-230P1**



**Features:**



- Protects Against Lightning, Surges, and Over Voltages
- Low Impulse Breakdown Voltage
- High Current and Multiple Strike Capability
- Low Capacitance
- Bi-Directional
- RoHS and RoHS2 Compliant
- ISO 9001 & ISO 14001 Certified
- UL Recognized (497B File E140906)
- Non-Radioactive and Maintenance Free
- Thru-hole Type and Clip Type Available (Model P1 and Model A)



Electrical Characteristics	
DC Breakdown Voltage (100 V/sec)	230V ± 20%
Impulse Breakdown Voltage (1 kV/μsec)	≤ 600V
Insulation Resistance (at 100VDC)	≥ 10,000M Ω
Capacitance (at 1MHz)	≤ 3pF
DC Holdover Voltage (in accordance to ITU-T K.12)	52V (with current turn-off time of <150ms)
Impulse Life (with 10/1000μsec impulse)	200A (100 times) (100A x 2)
Impulse Discharge Current (with 8/20μsec impulse)	10kA (5 times in each polarity) (5kA x 2)
Impulse Discharge Current (with 10/35μsec impulse)	5kA (2 times) (2.5kA x 2)
AC Discharge Current (50 Hz for 1 second)	10A (10 times) (5A x 2)
After Life Performance (Specs after exceeding Impulse Life, Impulse Discharge Current, or AC Discharge Current conditions)	
DC Breakdown Voltage (100 V/sec)	170V ~ 300V
Impulse Breakdown Voltage (1 kV/μsec)	≤ 700V
Insulation Resistance (at 100VDC)	≥ 100M Ω
Mechanical Characteristics	
Number of Electrodes & Electrode Material	Three Electrodes, Tin Plated
Form Factor / Mounting Method	Thru-hole or Clip
Packaging Type	Tray (100 pcs per tray)
Environmental Characteristics	
Operating and Storage Temperature Range	-40°C to +90°C (-40°F to 194°F)
Operating and Storage Humidity	≤ 90% non-condensing

**Applications:**

- Transient Voltage Surge Suppression (TVSS)
- Cable and Telephone Products
- Routers and Access Points
- Modems/Cable Modems
- Broadband/CATV/Coaxial Protectors

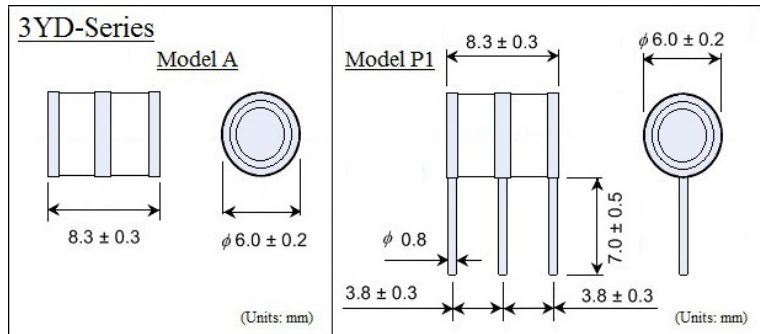

SANKOSHA

SANKOSHA